



DOUBLE ACTING PILOT CHECK VALVES - FLANGED VERSION




VPB pilot check valves are used to lock a double acting actuator in place in both directions, ensuring the load is locked.



HYDRAULIC CIRCUIT



PERFORMANCES

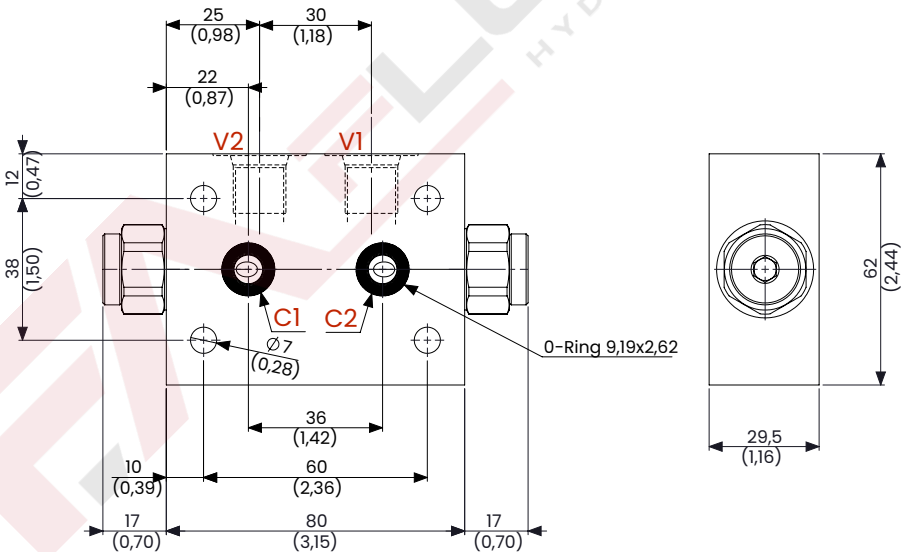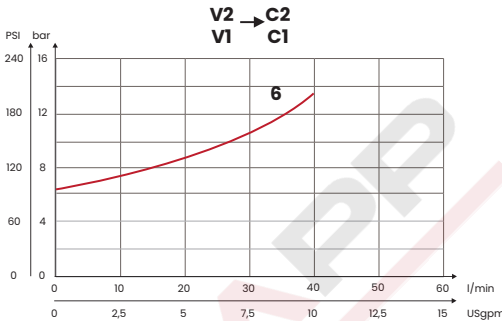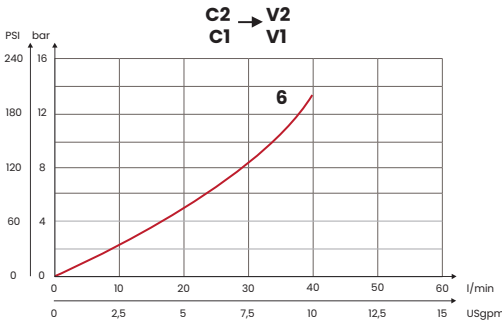

mm [Inches]

ORDERING CODE

CODE	TYPE	F ports	MAX FLOW l/min [USgpm]	MAX PRESSURE bar [PSI]	PILOT RATIO	CRACKING PRESSURE bar [PSI]	WEIGHT kg [lb]
FA5063	VPB1S	SAE 6 [9/16-18 UNF]	35 [9,2]	350 [5075]	1:3,3	4,5 [65]	1,1 [2,42]